Lossy Computing of Correlated Sources with Fractional Sampling

Xi Liu, *Student Member, IEEE,* Osvaldo Simeone, *Member, IEEE,* and Elza Erkip, *Fellow, IEEE*

arXiv:1206.1389v2 [cs.IT] 23 Nov 2012

***Abstract*—This paper considers the problem of lossy compression for the computation of a function of two correlated sources, both of which are observed at the encoder. Due to presence of observation costs, the encoder is allowed to observe only subsets of the samples from both sources, with a fraction of such sample pairs possibly overlapping. The rate-distortion function is characterized for memoryless sources, and then specialized to Gaussian and binary sources for selected functions and with quadratic and Hamming distortion metrics, respectively. The optimal measurement overlap fraction is shown to depend on the function to be computed by the decoder, on the source statistics, including the correlation, and on the link rate. Special cases are discussed in which the optimal overlap fraction is the maximum or minimum possible value given the sampling budget, illustrating non-trivial performance trade-offs in the design of the sampling strategy. The trade-off between the average distortion and the worst-case distortion is then studied. Finally, the analysis is extended to the multi-hop set-up with jointly Gaussian sources, where each encoder can observe only one of the sources.**

I. Introduction

Consider an encoder endowed with a sensor that is able to measure two correlated discrete memoryless source sequences $S_1^n = (S_{1,1}, ..., S_{1,n})$ and $S_2^n = (S_{2,1}, ..., S_{2,n})$, as shown in Fig. 1. Due to the energy cost of source acquisition, sampling, quantization and compression, it might not be possible for the sensor to fully measure the sources S_1 and S_2. To simplify, this limitation can be modelled by imposing that only $n\theta_k$ samples can be measured from each source S_k, $k = 1, 2$, with $0 \leq \theta_k \leq 1$. The encoder compresses the measured samples to nR bits, where R is the communication rate in bits per source sample. Based on the received bits, the decoder reconstructs a lossy version of a target function $T^n = f^n(S_1^n, S_2^n)$ of source sequences S_1^n and S_2^n, which is calculated symbol-by-symbol as $T_i = f(S_{1,i}, S_{2,i})$, $i = 1, ..., n$. We refer to the above problem as *lossy computing with fractional sampling*.



Fig. 1. The encoder measures correlated sources S_1 and S_2 for a fraction of time θ_1 and θ_2, respectively, and the decoder estimates a function $T^n = f^n(S_1^n, S_2^n)$.

A key aspect of the problem of lossy computing with fractional sampling is that the encoder is allowed to choose *which* samples to measure given the sampling budget (θ_1, θ_2). To fix the ideas, assume that we have $(\theta_1, \theta_2) = (0.5, 0.5)$, so that only half of the samples can be observed from both sources. As two extreme strategies, the encoder can either measure the same samples from both sources, say $S_{1,i}, S_{2,i}$ for $i = 1, ..., n/2$, or it can measure the first source S_1 for the first $n/2$ samples, namely $S_{1,i}$ for $i = 1, ..., n/2$, and the second source S_2 for the remaining $n/2$ samples, namely $S_{2,i}$ for $i = n/2 + 1, ..., n$. With the first sampling strategy, the encoder is able to directly calculate the desired function $T_i = f(S_{1,i}, S_{2,i})$ for $i = 1, ..., n/2$, while having no information (beside the prior distribution) about T_i for the remaining samples. With the second strategy, instead, the encoder collects partial information about T at all times in the form of samples from source S_1 or source S_2.



Fig. 2. The multi-hop setup studied in Section VII: Encoder 1 and Encoder 2 measure correlated sources S_1 and S_2 for a fraction of time θ_1 and θ_2, respectively, and the decoder estimates a function $T^n = f^n(S_1^n, S_2^n)$.

Relating the discussed fractional sampling model with prior literature, we observe that, with full sampling of both sources, i.e., $(\theta_1 = 1, \theta_2 = 1)$, the encoder can directly calculate the function $T^n = f^n(S_1^n, S_2^n)$ and the problem at hand reduces to the standard rate-distortion set-up (see, e.g., [1]). Instead, if the encoder can only measure one of the two sources, i.e., $(\theta_1 = 1, \theta_2 = 0)$ or $(\theta_1 = 0, \theta_2 = 1)$, the problem at hand becomes a special case of the indirect source coding set-up introduced in [2]. The framework of source coding with fractional sampling was introduced in our previous work [3] for a model in which an energy-constrained sensor measures independent Gaussian sources and the receiver wishes to reconstruct all sources with given quadratic distortion constraints. The model of fractional sampling is also related to that of compression with actions of [4], in which the decoder obtains side information by taking cost-constrained actions based on the message received from the encoder.

The main contributions and the organization of the paper are as follows. We formulate the problem of lossy computing with fractional sampling of correlated sources for the set-up in Fig. 1 in Section II. After providing a general expression for the distortion-rate and the rate-distortion functions in Section III, we specialize it to Gaussian sources and weighted sum

X. Liu and E. Erkip are with the ECE Department, Polytechnic Institute of New York University, Brooklyn, NY 11201. (Email: xliu02@students.poly.edu, elza@poly.edu).

O. Simeone is with the ECE Department, New Jersey Institute of Technology, Newark, NJ 07102. (Email: osvaldo.simeone@njit.edu).

function $T = w_1 S_1 + w_2 S_2$ in Section IV and binary sources with arbitrary functions $T = f(S_1, S_2)$ in Section V. As a result, various conclusions are drawn regarding conditions under which the optimal sampling strategy prescribes the maximum or the minimum possible overlap between the samples measured from the two sources. Next, we investigate the trade-off between the average distortion and the worst-case distortion in Section VI. In Section VII, we extend the analysis to the multi-hop set-up of Fig. 2, in which sources S_1 and S_2 are measured by different encoders connected by a finite-capacity link.

II. System Model

In this section, we formally introduce the system model of interest for the point-to-point set-up of Fig. 1. The multi-hop model will be introduced in Section VII. As shown in Fig. 1, the encoder has access to two discrete memoryless source sequences $S_1^n = (S_{1,1}, ..., S_{1,n})$ and $S_2^n = (S_{2,1}, ..., S_{2,n})$ respectively, which consist of n independent and identically distributed (i.i.d.) samples $(S_{1,i}, S_{2,i})$ with $S_{1,i} \in \mathcal{S}_1$ and $S_{2,i} \in \mathcal{S}_2$, $i = 1, ..., n$, where $\mathcal{S}_1$ and $\mathcal{S}_2$ are the alphabet sets for S_1 and S_2 respectively. All alphabets are assumed to be finite unless otherwise stated. Due to presence of observation costs, we assume the encoder can only sample a fraction θ_k of the samples for source S_k, with $0 \leq \theta_k \leq 1$ for $k = 1, 2$, where the samples are determined prior to the observation of (S_1^n, S_2^n). Given the i.i.d. nature of the sources, without loss of generality, we assume that the encoder measures the first θ_1 fraction of samples of source S_1 and measures the θ_2 fraction of samples of S_2 starting from sample $n(\theta_1 - \theta_{12}) + 1$[1], as shown in Fig. 3. The samples measured at the encoder from the two sources thus overlap for a fraction θ_{12}, with θ_{12} satisfying

$$\theta_{12,min} \leq \theta_{12} \leq \theta_{12,max}, \tag{1}$$

with $\theta_{12,min} = (\theta_1 + \theta_2 - 1)^+$ and $\theta_{12,max} = \min(\theta_1, \theta_2)$, where $(\cdot)^+$ denotes $\max(\cdot, 0)$. We refer to the triple $(\theta_1, \theta_2, \theta_{12})$ as a *sampling profile*, and to (θ_1, θ_2) as the *sampling budget*. The decoder wishes to estimate a function

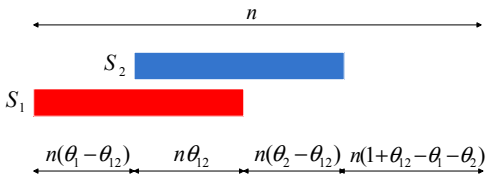

Fig. 3. Sampling profile $(\theta_1, \theta_2, \theta_{12})$ at the encoder: a fraction, $\theta_1 - \theta_{12}$, of samples is measured only from source S_1; a fraction, θ_{12}, of samples is measured from both sources; a fraction, $\theta_2 - \theta_{12}$, of samples is measured only from source S_2; and the remaining fraction, $1 + \theta_{12} - \theta_1 - \theta_2$, of samples is not measured for either source ($0 \leq \theta_1, \theta_2 \leq 1$, and θ_{12} as in (1)).

$T^n = f^n(S_1^n, S_2^n)$, where $T_i = f(S_{1,i}, S_{2,i})$ for $i = 1, ..., n$. We let $d: \mathcal{T} \times \hat{\mathcal{T}} \to [0, +\infty)$ be a distortion measure, where $\mathcal{T}$ and $\hat{\mathcal{T}}$ are the alphabet sets of the variables T and $\hat{T}$ respectively. We assume, without loss of generality, that for each $t \in \mathcal{T}$ there exists a $\hat{t} \in \mathcal{T}$ such that $d(t, \hat{t}) = 0$. The link between the encoder and the decoder can support a rate of R bits/sample. Formal definitions follow.

Definition 1: A $(n, R, D, \theta_1, \theta_2, \theta_{12})$ code for the problem of lossy computing of two memoryless sources with fractional sampling consists of an encoder $h: \mathcal{S}_1^{n\theta_1} \times \mathcal{S}_2^{n\theta_2} \to \{1, ..., 2^{nR}\}$, which maps the measured θ_1-fraction of source S_1, i.e., $(S_{1,1}, ..., S_{1,n\theta_1})$, and the measured θ_2-fraction of source S_2, i.e., $(S_{2,n(\theta_1-\theta_{12})+1}, ..., S_{2,n(\theta_1+\theta_2-\theta_{12})})$, into a message of rate R bits per source sample (where the normalization is with respect to the overall number of samples n); and a decoder $g: \{1, ..., 2^{nR}\} \to \hat{\mathcal{T}}^n$, which maps the message from the encoder into an estimate $\hat{T}^n$, such that the *average* distortion constraint D is satisfied, i.e.,

$$\frac{1}{n} E\left[\sum_{i=1}^{n} d(T_i, \hat{T}_i)\right] \leq D. \tag{2}$$

Given any sampling profile $(\theta_1, \theta_2, \theta_{12})$, a tuple $(R, D, \theta_1, \theta_2, \theta_{12})$ is said to be achievable, if for any $\epsilon > 0$, and sufficiently large n, there exists a $(n, R, D+\epsilon, \theta_1, \theta_2, \theta_{12})$ code. The *distortion-rate function* for a given sampling profile $D(R, \theta_1, \theta_2, \theta_{12})$ is defined as $D(R, \theta_1, \theta_2, \theta_{12}) = \inf\{D: (R, D, \theta_1, \theta_2, \theta_{12}) \text{ is achievable}\}$. The *distortion-rate function* with sampling budget (θ_1, θ_2), $D(R, \theta_1, \theta_2)$, is defined as $D(R, \theta_1, \theta_2) = \min_{\theta_{12}} D(R, \theta_1, \theta_2, \theta_{12})$ where the minimum is taken over all θ_{12} satisfying (1). Similar definitions are used for the rate-distortion function. Specifically, the *rate-distortion function* given a sampling profile $(\theta_1, \theta_2, \theta_{12})$ and distortion D is defined as $R(D, \theta_1, \theta_2, \theta_{12}) = \inf\{R: (R, D, \theta_1, \theta_2, \theta_{12}) \text{ is achievable}\}$, and the rate-distortion function with sampling budget (θ_1, θ_2) as $R(D, \theta_1, \theta_2) = \min_{\theta_{12}} R(D, \theta_1, \theta_2, \theta_{12})$ where the minimum is taken over all θ_{12} satisfying (1). We note that, while (2) measures the average expected distortion across all samples, in Section VI we will consider also the worst-case expected distortion $\max_{i \in \{1,...,n\}} E(d(T_i, \hat{T}_i))$, where the expectation is taken over the source distribution.

III. Rate-Distortion Trade-Off with Fractional Sampling

In this section, we characterize the distortion-rate functions $D(R, \theta_1, \theta_2, \theta_{12})$ and $D(R, \theta_1, \theta_2)$ defined above as well as their rate-distortion counterparts. To elaborate, we first define the standard distortion-rate function for the memoryless source T as $D_{12}(R) = \min_{p(\hat{t}|t):\, I(T;\hat{T}) \leq R} E[d(T, \hat{T})]$ [1]. We similarly define the corresponding rate-distortion function with full sampling as $R_{12}(D) = \min_{p(\hat{t}|t):\, E[d(T,\hat{T})] \leq D} I(T; \hat{T})$. Moreover, we define the indirect distortion-rate function for compression of source T when only S_k is observed at the encoder[2], for $k = 1, 2$, as $D_k(R) = \min_{p(\hat{t}|s_k):\, I(S_k;\hat{T}) \leq R} E[d(T, \hat{T})]$. We similarly define the corresponding rate-distortion function $R_k(D) = \min_{p(\hat{t}|s_k):\, E[d(T,\hat{T})] \leq D} I(S_k; \hat{T})$. Finally, we define $D_{k,min}$ as $D_{k,min} = \lim_{R \to \infty} D_k(R) = \min_{g_k(\cdot)} E(d(T, g_k(S_k)))$, for $k = 1, 2$, where function $g_k(\cdot)$ is a function $g_k: \mathcal{S}_k \to \hat{\mathcal{T}}$.

[1]Throughout the paper, quantities such as $n\theta_1$, $n\theta_2$ and $n(\theta_1 + \theta_2 - \theta_{12})$ are implicitly assumed to be rounded to the largest smaller integer.

[2]In this case, for any $k, k' \in \{1, 2\}$ and $k \neq k'$, $\hat{T} \to S_k \to S_{k'}$ forms a Markov chain.

Lemma 1: For any given sampling profile $(\theta_1, \theta_2, \theta_{12})$ and link rate R, the distortion-rate function for computing T is given by[3]

$$D(R,\theta_1,\theta_2,\theta_{12}) = \min_{R_1,R_{12},R_2\geq 0} (\theta_1-\theta_{12})D_1\left(\frac{R_1}{\theta_1-\theta_{12}}\right) + \theta_{12}D_{12}\left(\frac{R_{12}}{\theta_{12}}\right) + (\theta_2-\theta_{12})D_2\left(\frac{R_2}{\theta_2-\theta_{12}}\right) + (1+\theta_{12}-\theta_1-\theta_2)D_{max}, \quad (3)$$

with $D_{max} = \min_{\hat{t}\in\hat{\mathcal{T}}} E[d(T,\hat{t})]$, and where the minimization is taken under the constraint $R_1+R_2+R_{12}\leq R$. Moreover, defining

$$D_{min}(\theta_1,\theta_2,\theta_{12}) = \lim_{R\to\infty} D(R,\theta_1,\theta_2,\theta_{12}) = (\theta_1-\theta_{12})D_{1,min} + (\theta_2-\theta_{12})D_{2,min} + (1+\theta_{12}-\theta_1-\theta_2)D_{max}, \quad (4)$$

for any given sampling profile $(\theta_1, \theta_2, \theta_{12})$ and distortion level $D \geq D_{min}(\theta_1, \theta_2, \theta_{12})$, the rate-distortion function for computing T is given by

$$R(D,\theta_1,\theta_2,\theta_{12}) = \min_{D_1,D_2,D_{12}} (\theta_1-\theta_{12})R_1\left(\frac{D_1}{\theta_1-\theta_{12}}\right) + \theta_{12}R_{12}\left(\frac{D_{12}}{\theta_{12}}\right) + (\theta_2-\theta_{12})R_2\left(\frac{D_2}{\theta_2-\theta_{12}}\right), \quad (5)$$

where the minimization is taken over all choices of D_1, D_2 and D_{12} satisfying $D_{12}\geq 0$, $D_k \geq (\theta_k-\theta_{12})D_{k,min}$, $k=1,2$, and

$$D_1+D_2+D_{12}+(1+\theta_{12}-\theta_1-\theta_2)D_{max}\leq D. \quad (6)$$

In the lemma above, rate R_k is assigned for the description of the $(\theta_k-\theta_{12})$-fraction of samples in which only source S_k is measured, $k=1,2$, while rate R_{12} is assigned for the description of the θ_{12}-fraction of samples in which both sources are measured (recall Fig. 3). Distortions D_1, D_2 and D_{12} are the weighted average per-sample distortions in the reconstruction of T at the decoder for the corresponding fractions of samples. The proof follows immediately from the independence of the samples measured from the different fractions, and it is thus omitted. We will need the following two lemmas.

Lemma 2: For any given sampling budget (θ_1, θ_2), with $R\to\infty$, the minimum achievable distortion for computing $T=f(S_1,S_2)$ is given by

$$D_{min}(\theta_1,\theta_2) = (\theta_1-\theta_{12}^*)D_{1,min} + (\theta_2-\theta_{12}^*)D_{2,min} + (1+\theta_{12}^*-\theta_1-\theta_2)D_{max}, \quad (7)$$

where $\theta_{12}^* = \theta_{12,max}$ if $D_{max} < D_{1,min}+D_{2,min}$, $\theta_{12}^* = \theta_{12,min}$ if $D_{max} > D_{1,min}+D_{2,min}$, and θ_{12}^* is arbitrary if $D_{max} = D_{1,min}+D_{2,min}$.

Proof: It follows by considering the monotonicity of (4) with respect to θ_{12}. ∎

[3]For the distortion function $D_1(x)$ for $x\geq 0$, we define $0\cdot D_1(x/0) = 0$, for $x\geq 0$, if $\lim_{x\to 0} x\cdot D_1(1/x) = 0$, and similarly for the distortion functions $D_{12}(x)$ and $D_2(x)$.

Lemma 3: $D(R,\theta_1,\theta_2)$ is continuous and convex in R for $R\geq 0$. Similarly, $R(D,\theta_1,\theta_2)$ is continuous and convex in D for $D\geq D_{min}(\theta_1,\theta_2)$.

Proof: It follows from the operation definitions given in Definition 1 similar to [1, Thm. 10.2.1]. ∎

IV. Gaussian Sources

In this section, we focus on the case in which sources S_1 and S_2 are jointly Gaussian, zero-mean, unit-variance and correlated with coefficient ρ, with $\rho\in[-1,1]$. The decoder wishes to compute a weighted sum function $T=w_1S_1+w_2S_2$, with $w_1,w_2\in\mathbb{R}$, under the mean square error (MSE) distortion measure $d(t,\hat{t})=(t-\hat{t})^2$. In the following, we study two specific choices for the weights $w_1=1, w_2=0$ and $w_1=w_2=1$, resulting in the functions $T=S_1$ and $T=S_1+S_2$, respectively. These two cases are selected in order to illustrate the impact of the choice of the function $f(S_1,S_2)$ on the optimal sampling strategy. The discussion can be extended with appropriate modifications to arbitrary choices of weights (w_1,w_2).

A. Computation of $T=S_1$

Proposition 1: For a given sampling budget (θ_1,θ_2), the distortion-rate function for computing $T=S_1$ is

$$D(R,\theta_1,\theta_2) = \begin{cases} 1-\theta_1+\theta_1 2^{-\frac{2R}{\theta_1}}, & \text{if } R\leq \frac{\theta_1}{2}\log_2\left(\frac{1}{\rho^2}\right), \\ 1-\theta_1-\rho^2(\theta_2-\theta_{12}^*) & \\ \quad +(\theta_1+\theta_2-\theta_{12}^*)2^{-\frac{2R}{\theta_1+\theta_2-\theta_{12}^*}} & \\ \quad \cdot\left(\rho^2\right)^{\frac{\theta_2-\theta_{12}^*}{\theta_1+\theta_2-\theta_{12}^*}}, & \text{otherwise}, \end{cases} \quad (8)$$

where $\theta_{12}^* = \theta_{12,min}$ is the optimal overlap fraction. The rate-distortion function $R(D,\theta_1,\theta_2)$ can be obtained by inverting function (8) with respect to variable D.

Proof: See Appendix A. ∎

Proposition 1 confirms the intuition that if the receiver is interested in source 1 only, i.e., $T=S_1$, the encoder should simultaneously measure both sources S_1 and S_2 for a fraction of time to be kept as small as possible. Moreover, if $R\leq\theta_1/2\log_2(1/\rho^2)$, the entire rate R is used to describe only the θ_1-fraction of samples measured from source S_1 only; otherwise, both the θ_1-fraction of source S_1 and the $(\theta_2-\theta_{12}^*)$-fraction of source S_2 that is not overlapped are described at positive rates.

B. Computation of $T=S_1+S_2$

We now consider the case in which the desired function is $T=S_1+S_2$. Note that T is a Gaussian random variable with zero mean and variance $D_{max}=2(1+\rho)$, and that T and S_1 (or S_2) are jointly Gaussian with correlation coefficient $\tilde{\rho}=\sqrt{(1+\rho)/2}$. Moreover, since $T=0$ for $\rho=-1$, it is enough to focus on the interval $\rho\in(-1,1]$. Finally, we recall that the distortion-rate function for T is given by $D_{12}(R)=2(1+\rho)2^{-2R}$ for $R\geq 0$ [1], and the indirect distortion-rate function is $D_k(R)=2(1+\rho)(1-\tilde{\rho}^2+\tilde{\rho}^2 2^{-2R})$ for $R\geq 0$ and $k=1,2$ [5].

Proposition 2: Given sampling budget (θ_1, θ_2), the distortion-rate function for computing $T = S_1 + S_2$ is

$$D(R,\theta_1,\theta_2) = \min_{\theta_{12},R_{12}} (1+\rho)^2(\theta_1+\theta_2-2\theta_{12})2^{-\frac{2(R-R_{12})}{\theta_1+\theta_2-2\theta_{12}}} + 2(1+\rho)\left(1+\rho\theta_{12}+\theta_{12}2^{-\frac{2R_{12}}{\theta_{12}}}\right) - (1+\rho)^2(\theta_1+\theta_2), \quad (9)$$

where the minimization is taken over all θ_{12} satisfying (1) and all R_{12} satisfying $R_{12} \le R$.

Proof: This proposition follows by Lemma 1 using arguments similar to the ones in Appendix A. ■

In order to obtain further analytical insight into (9) and the optimal sampling strategy, we now consider some special cases of interest.

Proposition 3: For $R \to \infty$, we have

$$D_{min}(\theta_1,\theta_2) = 2(1+\rho)(1+\rho\theta_{12}^*) - (1+\rho)^2(\theta_1+\theta_2), \quad (10)$$

where $\theta_{12}^* = \theta_{12,min}$ if $\rho > 0$, $\theta_{12}^* = \theta_{12,max}$ if $\rho < 0$, and θ_{12}^* is arbitrary if $\rho = 0$.

This proposition is easily obtained from Lemma 2. It says that, if the sources (S_1, S_2) have positive correlation, i.e., $\rho > 0$, and there are no rate limitations ($R \to \infty$), the MSE distortion increases linearly with θ_{12}, and it is thus optimal to set θ_{12} to be the smallest possible value $\theta_{12}^* = \theta_{12,min}$. In contrast, if $\rho < 0$, the MSE distortion decreases linearly with θ_{12}, and thus the optimal θ_{12}^* is the largest possible value, $\theta_{12}^* = \theta_{12,max}$. This shows the relevance of the source correlation in designing the optimal sampling strategy.

The general conclusions about the optimal sampling strategies discussed above for infinite rate can be extended to finite rates R in certain regimes. Specifically, Proposition 4 below states that if $\rho \le 0$, then, just as in the case of $R \to \infty$ of Proposition 3, the encoder should set θ_{12} to be as large as possible, i.e., $\theta_{12}^* = \theta_{12,max}$, irrespective of the value of R. Furthermore, Proposition 5 below demonstrates that, for sufficiently small rates, the optimal overlap θ_{12}^* tends to be maximum, i.e., $\theta_{12}^* = \theta_{12,max}$, for a larger range of correlation coefficients ρ than $\rho \le 0$. This is mainly because when rate R is small enough, it is generally more efficient to use the available rate to describe T directly during the overlapping θ_{12}-fraction, rather than indirectly describing T based on observations of S_1 or S_2 alone.

Proposition 4: For $\rho \le 0$, the distortion-rate function is

$$D(R,\theta_1,\theta_2) = \begin{cases} (\theta_1+\theta_2-\theta_{12}^*)(1+\rho)^2 2^{-\frac{2R}{\theta_1+\theta_2-\theta_{12}^*}} \\ \cdot\left(\frac{2}{1+\rho}\right)^{\frac{\theta_{12}^*}{\theta_1+\theta_2-\theta_{12}^*}} + 2(1+\rho)(1+\rho\theta_{12}^*) \\ -(1+\rho)^2(\theta_1+\theta_2), \text{ if } R > \frac{\theta_{12}^*}{2}\log_2\left(\frac{2}{1+\rho}\right), \\ 2(1+\rho)\left(1-\theta_{12}^*+\theta_{12}^* 2^{-\frac{2R}{\theta_{12}^*}}\right), \text{ otherwise,} \end{cases} \quad (11)$$

where $\theta_{12}^* = \theta_{12,max}$ is the optimal overlapping fraction.

Proof: The proof is obtained by solving (9) for $\rho \le 0$. ■

Proposition 5: For any $\rho > 0$, if $R \le (\theta_{12,min}/2)\log_2(2/(1+\rho))$, the distortion-rate function is given as

$$D(R,\theta_1,\theta_2) = 2(1+\rho)(1-\theta_{12}^*) + 2(1+\rho)\theta_{12}^* 2^{-\frac{2R}{\theta_{12}^*}}, \quad (12)$$

where $\theta_{12}^* = \theta_{12,max}$.

Proof: Given $R \le (\theta_{12,min}/2)\log_2(2/(1+\rho))$, for any feasible θ_{12} satisfying (1), we always have $R \le (\theta_{12}/2)\log_2(2/(1+\rho))$. In this case, for any given θ_{12}, applying the standard Lagrangian method to (9), we obtain $R_{12}^* = R$. Substituting into (9) and considering the monotonicity of function $D(R,\theta_1,\theta_2,\theta_{12})$ with respect to θ_{12}, we can show that the optimal overlap fraction is given by $\theta_{12}^* = \theta_{12,max}$, leading to the distortion-rate function as stated in the proposition. ■

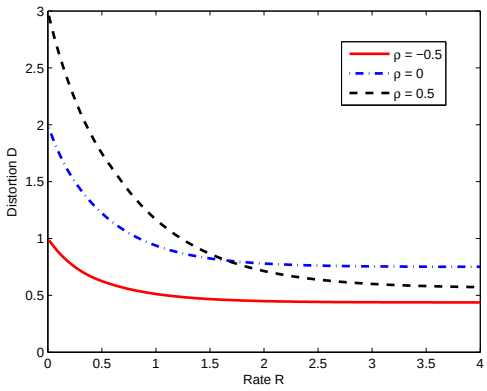

Fig. 4. Distortion-rate function for computing $T = S_1 + S_2$, (S_1, S_2) jointly Gaussian with correlation coefficient $\rho = -0.5, 0, 0.5$, respectively. The sampling budget is $(\theta_1, \theta_2) = (0.5, 0.75)$.

C. Numerical Results

In this subsection, we numerically evaluate the distortion-rate function for computation of function $T = S_1 + S_2$. Recall that for $T = S_1$, the optimal overlap fraction is always $\theta_{12,min}$. Fig. 4 and Fig. 5 show the minimum MSE distortion D and the optimal overlap fraction θ_{12}^* versus rate R, respectively, for $(\theta_1, \theta_2) = (0.5, 0.75)$, and $\rho = -0.5, 0, 0.5$. The curves are obtained by numerically solving the optimization in (9). It can be seen from Fig. 5 that, as predicted by Proposition 4, the optimal overlap fraction θ_{12}^* is equal to the maximum possible fraction $\theta_{12,max} = 0.5$, for $\rho = -0.5 < 0$ and $\rho = 0$. Moreover, for $\rho = 0.5 > 0$, with sufficiently small rates R, as described in Proposition 5, the optimal overlap fraction θ_{12}^* equals to the maximum overlap $\theta_{12,max} = 0.5$. However, as R increases, θ_{12}^* drops to the minimum value $\theta_{12,min} = 0.25$, which is consistent with Proposition 3.

V. Binary Sources

In this section, we consider binary sources so that $\mathcal{S}_1 = \mathcal{S}_2 = \mathcal{T} = \hat{\mathcal{T}} = \{0, 1\}$, and (S_1, S_2) is a doubly symmetric binary source (DSBS) characterized by probability $\Pr[S_1 \neq S_2] = p$, $0 \le p \le 1/2$. We take the Hamming distortion as the distortion measure, i.e., $d(t, \hat{t}) = 1 - \delta_{t\hat{t}}$, where $\delta_{t\hat{t}} = 1$ if $t = \hat{t}$ and $\delta_{t\hat{t}} = 0$ otherwise. Since all non-trivial binary functions are equivalent, up to relabeling, to either the exclusive OR or the AND [6], it suffices to consider only these two options for function $T = f(S_1, S_2)$: (*i*) the exclusive OR or binary sum, i.e., $T = S_1 \oplus S_2$; (*ii*) the AND or binary product, i.e.,

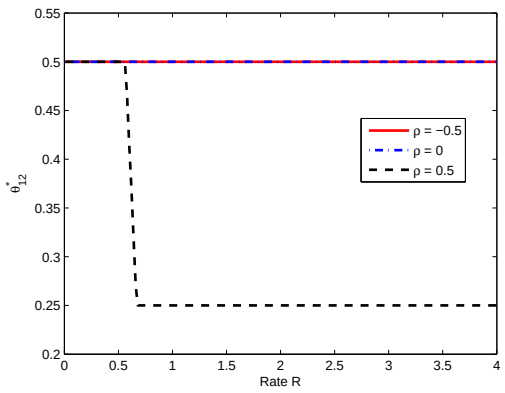

Fig. 5. Optimal overlap fraction θ^*_{12} that minimizes the average expected distortion as a function of rate R for computing $T = S_1 + S_2$, (S_1, S_2) jointly Gaussian with correlation coefficient $\rho = -0.5, 0, 0.5$, respectively. The sampling budget is $(\theta_1, \theta_2) = (0.5, 0.75)$.

$T = S_1 \otimes S_2$. In the following, we focus on deriving the rate-distortion $R(D, \theta_1, \theta_2)$ for convenience, since in general it takes a simpler analytical form as compared to the distortion-rate function $D(R, \theta_1, \theta_2)$.

A. Computation of $T = S_1 \oplus S_2$

Proposition 6: For given sampling budget (θ_1, θ_2), the rate-distortion function for computing $T = S_1 \oplus S_2$ is given by

$$R(D, \theta_1, \theta_2) = \begin{cases} h(p) - h\left(\frac{D-(1-\theta^*_{12})p}{\theta^*_{12}}\right), \\ \qquad \text{if } (1-\theta^*_{12})p \le D < p, \\ 0, \qquad \text{if } D \ge p, \end{cases} \tag{13}$$

where $h(x) = -x\log_2(x) - (1-x)\log_2(1-x)$ is the binary entropy function, and $\theta^*_{12} = \theta_{12,max}$ is the optimal overlap fraction, for $(1-\theta^*_{12})p \le D < p$.

The above proposition can be proved by using the fact that $T = S_1 \oplus S_2$ is a Bernoulli(p) random variable, and is independent of S_1 and S_2. Therefore, the observation of either S_1 or S_2 is not useful for computing T, and thus one should choose the overlap fraction to be as large as possible, i.e., $\theta^*_{12} = \theta_{12,max}$. The rate-distortion function (13) then follows immediately from the rate-distortion function of the binary random variable T [1].

B. Computation of $T = S_1 \otimes S_2$

In this subsection, we focus on the binary product $T = S_1 \otimes S_2$, which is Bernoulli distributed with probability $(1-p)/2$. For convenience, we start by finding the minimum possible distortion at the decoder given (θ_1, θ_2), i.e., $D_{min}(\theta_1, \theta_2)$ as defined in Lemma 3, and the minimum required rate to achieve it. Then, we proceed to derive the rate-distortion function.

Proposition 7: For given sampling budget (θ_1, θ_2), the minimum achievable distortion for computing $T = S_1 \otimes S_2$ is given by

$$D_{min}(\theta_1, \theta_2) = \frac{1-p}{2} + \left(p - \frac{1}{2}\right)(\theta_1 + \theta_2) + \left(\frac{1-3p}{2}\right)\theta^*_{12}, \tag{14}$$

where $\theta^*_{12} = \theta_{12,min}$ if $p < 1/3$ and $\theta^*_{12} = \theta_{12,max}$ if $1/3 \le p \le 1/2$. Moreover, distortion $D_{min}(\theta_1, \theta_2)$ can be achieved as long as $R \ge R_{min}(\theta_1, \theta_2) = \theta_1 + \theta_2 - \left(2 - h\left(\frac{1-p}{2}\right)\right)\theta^*_{12}$.

Proof: See Appendix B. ■

The results in Proposition 7 can be seen as the counterpart of Proposition 3 for binary sources. In fact, they show that, for sufficiently large R, if $p < 1/3$, the average Hamming distortion increases linearly with θ_{12} and thus we should set θ_{12} to the smallest possible value $\theta_{12,min}$; instead, if $1/3 \le p \le 1/2$, the optimal value of θ_{12} is the largest possible, namely, $\theta_{12,max}$.

Before we proceed to investigate the general rate-distortion function $R(D, \theta_1, \theta_2)$, we first derive the indirect rate-distortion function $R_1(D)$ when only S_1 is observed at the encoder.

Lemma 4: The indirect rate-distortion function for $T = S_1 \otimes S_2$ is given by

$$R_1(D) = \begin{cases} \min\limits_{\frac{1-p-2D}{1-2p} \le y \le 1} h\left(D + y(1-p) + \frac{p-1}{2}\right) - \frac{1}{2}h(y) \\ \quad -\frac{1}{2}h(2d + y(1-2p) + p - 1), \quad \frac{p}{2} < D \le \frac{1-p}{2}, \\ 0, \quad D \ge \frac{1-p}{2}, \end{cases} \tag{15}$$

Proof: See Appendix C. ■

By symmetry, the indirect rate-distortion function $R_2(D)$ for T when S_2 is observed at the encoder is also given by Lemma 4. The rate-distortion function $R_{12}(D)$ for T is obtained from standard results [1] as $R_{12}(D) = h((1-p)/2) - h(D)$ if $0 \le D \le (1-p)/2$, and $R_{12}(D) = 0$ if $D > (1-p)/2$.

Proposition 8: For a given sampling budget (θ_1, θ_2), the rate-distortion function for computing $T = S_1 \otimes S_2$ is given as

$$R(D, \theta_1, \theta_2) = \begin{cases} \min\limits_{\theta_{12}, D_3, D_{12}} \theta_{12}\left(h\left(\frac{1-p}{2}\right) - h\left(\frac{D_{12}}{\theta_{12}}\right)\right) \\ \quad +(\theta_1 + \theta_2 - 2\theta_{12})R_1\left(\frac{D_3}{\theta_1+\theta_2-2\theta_{12}}\right), \\ \qquad \text{if } D_{min}(\theta_1, \theta_2) \le D < \frac{1-p}{2}, \\ 0, \qquad \text{if } D \ge \frac{1-p}{2}, \end{cases} \tag{16}$$

where $D_{min}(\theta_1, \theta_2)$ is as given in Proposition 7 and the minimization is taken over all choices of θ_{12}, D_3 and D_{12} such that (1) is satisfied, $p(\theta_1 + \theta_2 - 2\theta_{12})/2 \le D_3 \le (1-p)(\theta_1 + \theta_2 - 2\theta_{12})/2$, $p\theta_{12}/2 \le D_{12} \le (1-p)\theta_{12}/2$, and

$$D_3 + D_{12} + \left(\frac{1-p}{2}\right)(1 + \theta_{12} - \theta_1 - \theta_2) = D. \tag{17}$$

Proof: See Appendix D. ■

C. Numerical Results

In this subsection, we numerically evaluate the distortion-rate function for computation of function $T = S_1 \otimes S_2$. Recall that for $T = S_1 \oplus S_2$, the optimal overlap fraction is always $\theta_{12,max}$. Fig. 6 and Fig. 7 plot the minimum average Hamming distortion D and the optimal overlap fraction θ^*_{12} for $(\theta_1, \theta_2) = (0.5, 0.75)$, and $p = 0.1, 0.2, 0.4$. In Fig. 6, as predicted by Proposition 7, the minimum rate $R_{min}(\theta_1, \theta_2)$

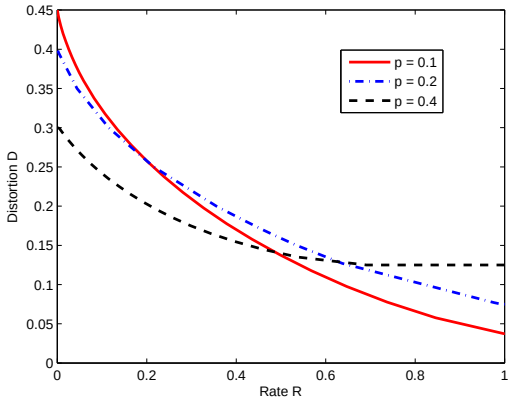

Fig. 6. Distortion-rate function for computing $T = S_1 \otimes S_2$, (S_1, S_2) doubly symmetric binary with probability $\Pr[S_1 \neq S_2]$ equal to $p = 0.1, 0.2, 0.4$, respectively. The sampling budget is $(\theta_1, \theta_2) = (0.5, 0.75)$.

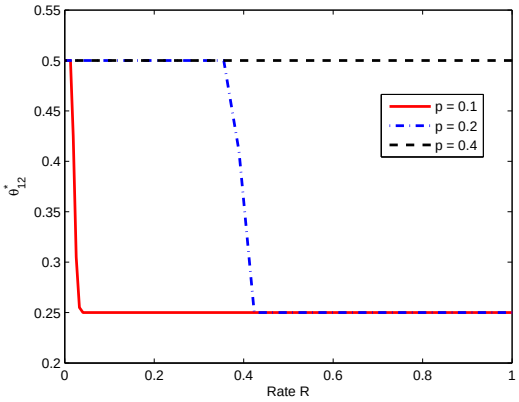

Fig. 7. Optimal overlap fraction θ_{12}^* that minimizes the average expected distortion as a function of R for computing $T = S_1 \otimes S_2$, (S_1, S_2) doubly symmetric binary with probability $\Pr[S_1 \neq S_2]$ equal to $p = 0.1, 0.2, 0.4$, respectively. The sampling budget is $(\theta_1, \theta_2) = (0.5, 0.75)$.

that achieves distortion $D_{min}(\theta_1, \theta_2)$, is given by 0.9982, 0.9927, 0.69 for $p = 0.1, 0.2, 0.4$, respectively. It can be observed from Fig. 7, for $p = 0.4 > 1/3$, the optimal overlap fraction θ_{12}^* is equal to the maximum possible value $\theta_{12,max} = 0.5$, for any $0 \leq R \leq 1$. However, for smaller probabilities $p = 0.1, 0.2$, the optimal overlap fraction equals to the maximum possible value $\theta_{12,max} = 0.5$ for sufficiently smaller rates and then drops to the minimum possible value $\theta_{12,min} = 0.25$ once R gets larger. Moreover, the smaller the probability p is, the larger range of rates R over which the optimal overlap fraction θ_{12}^* is $\theta_{12,min} = 0.25$. We note that with a larger p, it is easier to describe T directly, since $T \sim$ Bernoulli$((1-p)/2)$, but the indirect description of T based on S_1 or S_2 becomes more difficult since T becomes less correlated with S_1 or S_2.[4] This explains why the optimal overlap fraction should be chosen as the maximum possible value $\theta_{12,max} = 0.5$ when p is larger than $1/3$ (see the curve $p = 0.4$). In this sense, the regime $p \geq 1/3$ may be considered as the binary counterpart of the regime $\rho \leq 0$ for the Gaussian sum case in Section IV-B. For probabilities $p < 1/3$, the numerical results above imply that the optimal overlap depends on the link rate R. Similar to the Gaussian sum case when $\rho > 0$ (Proposition 5), when R is sufficiently small, it remains optimal to choose the overlap fraction to be the maximum possible; however, as R grows sufficiently large, it is more advantageous to have the overlap fraction as small as possible, which is consistent with Proposition 7.

VI. Trade-Off between Average Distortion and Worst-Case Distortion

In the problem formulation considered so far, the goal was minimizing the average distortion $D(R, \theta_1, \theta_2)$ at the decoder for any given rate R and sampling budget (θ_1, θ_2). As a result of the average of over all the source samples in (2), this performance metric does not make guarantees on the maximum average distortion per sample. In fact, as seen in (3), the average distortion is the average of the distortions accrued over the four relevant fractions of samples illustrated in Fig. 3, namely the fraction of samples in which only S_1, both S_1 and S_2, only S_2 or neither S_1 nor S_2 are measured. This section extends the analysis in the previous sections in order to allow the decoder to strike the desired balance between the average and the worst-case distortions.

[4]The correlation between T and S_1 or S_2 is given by $\sqrt{(1-p)/(1+p)}$.

A. Formulation for General Sources

For any given sampling profile $(\theta_1, \theta_2, \theta_{12})$ and any rate allocation (R_1, R_2, R_{12}), we define $D_w(R_1, R_2, R_{12}, \theta_1, \theta_2, \theta_{12})$ as the maximum average distortion among all the sampling fractions shown in Fig. 2, i.e.,

$$D_w(R_1, R_2, R_{12}, \theta_1, \theta_2, \theta_{12}) = \max \Bigg[1_{\{\theta_1 - \theta_{12} > 0\}} D_1 \left(\frac{R_1}{\theta_1 - \theta_{12}} \right), 1_{\{\theta_2 - \theta_{12} > 0\}} D_2 \left(\frac{R_2}{\theta_2 - \theta_{12}} \right), 1_{\{1 + \theta_{12} - \theta_1 - \theta_2 > 0\}} D_{max}, 1_{\{\theta_{12} > 0\}} D_{12} \left(\frac{R_{12}}{\theta_{12}} \right) \Bigg], \quad (18)$$

where the indicator function $1_{\{A\}}$ takes value 1 if A is true and 0 otherwise. We then define the weighted sum of the average distortion in (2) and the worst-case distortion (18) as

$$\begin{aligned} D_\mu(R, \theta_1, \theta_2, \theta_{12}) = \min_{R_1, R_2, R_{12} \geq 0} & (\theta_1 - \theta_{12}) D_1 \left(\frac{R_1}{\theta_1 - \theta_{12}} \right) \\ & + \theta_{12} D_{12} \left(\frac{R_{12}}{\theta_{12}} \right) + (\theta_2 - \theta_{12}) D_2 \left(\frac{R_2}{\theta_2 - \theta_{12}} \right) \\ & + (1 + \theta_{12} - \theta_1 - \theta_2) D_{max} \\ & + \mu D_w(R_1, R_2, R_{12}, \theta_1, \theta_2, \theta_{12}), \end{aligned} \quad (19)$$

where $\mu > 0$ is the relative weight of the worst-case distortion. Accordingly, for any given rate R and sampling budget (θ_1, θ_2), the modified distortion-rate trade-off is characterized by $D_\mu(R, \theta_1, \theta_2) = \inf_{\theta_{12}} D_\mu(R, \theta_1, \theta_2, \theta_{12})$.

In the case of sampling budget (θ_1, θ_2) satisfying $\theta_1 + \theta_2 < 1$, regardless of the choice of the overlap fraction θ_{12} and of the rate allocation (R_1, R_2, R_{12}), the worst-case distortion occurs during the $(1 + \theta_{12} - \theta_1 - \theta_2)$-fraction of

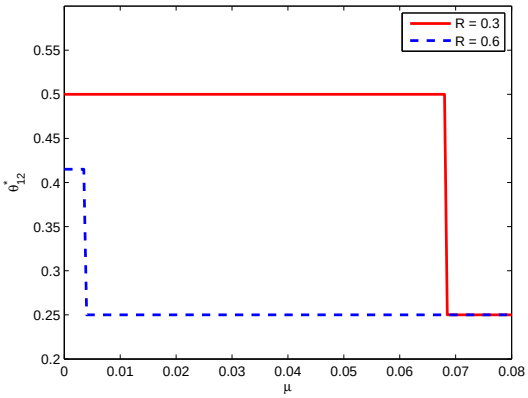

Fig. 8. Optimal overlap fraction θ^*_{12} that minimizes distortion $D_\mu(R, \theta_1, \theta_2)$ as a function of μ for computing $T = S_1 + S_2$, (S_1, S_2) jointly Gaussian with correlation coefficient $\rho = 0.5$. The sample budget is $(\theta_1, \theta_2) = (0.5, 0.75)$ and the link rate is $R = 0.3, 0.6$, respectively.

samples in which neither source is measured and therefore we have $D_w(R_1, R_2, R_{12}, \theta_1, \theta_2, \theta_{12}) = D_{max}$. In this case, the addition of a constant term in the objective function of (19) does not affect the optimization and thus the optimal overlap fraction θ^*_{12} and the optimal rate allocation (R^*_1, R^*_2, R^*_{12}) remains the same as in the case when $\mu = 0$. Therefore, in the following, we focus on the nontrivial case where we have $0 < \theta_1 < 1$, $0 < \theta_2 < 1$ and $\theta_1 + \theta_2 \geq 1$. In this regime, function $D_\mu(R, \theta_1, \theta_2, \theta_{12})$ takes different forms depending on the value of θ_{12}. Specifically, if the overlap fraction θ_{12} is selected such that $\theta_{12,min} < \theta_{12} \leq \theta_{12,max}$, then we have

$$\begin{aligned} D_\mu(R, \theta_1, \theta_2, \theta_{12}) = &\min_{R_1, R_{12}, R_2 \geq 0} (\theta_1 - \theta_{12}) D_1\left(\frac{R_1}{\theta_1 - \theta_{12}}\right) \\ &+ \theta_{12} D_{12}\left(\frac{R_{12}}{\theta_{12}}\right) + (\theta_2 - \theta_{12}) D_2\left(\frac{R_2}{\theta_2 - \theta_{12}}\right) \\ &+ (1 + \theta_{12} - \theta_1 - \theta_2) D_{max} + \mu D_{max}. \end{aligned} \tag{20}$$

This is because, with $\theta_{12,min} = \theta_1 + \theta_2 - 1$, we have $1 + \theta_{12} - \theta_1 - \theta_2 > 0$ and accordingly $D_w(\theta_1, \theta_2, \theta_{12}, R_1, R_2, R_{12}) = D_{max}$. The minimum distortion (20) when θ_{12} is in the interval $\theta_{12,min} < \theta_{12} \leq \theta_{12,max}$ thus can be obtained in the same manner as done in the previous sections when $\mu = 0$. On the other hand, if the overlap fraction is $\theta_{12} = \theta_{12,min} = \theta_1 + \theta_2 - 1$, then we can write

$$\begin{aligned} D_\mu(R, \theta_1, \theta_2, \theta_{12,min}) = &\min_{R_1, R_{12}, R_2} (1 - \theta_2) D_1\left(\frac{R_1}{1 - \theta_2}\right) \\ &+ (\theta_1 + \theta_2 - 1) D_{12}\left(\frac{R_{12}}{\theta_1 + \theta_2 - 1}\right) + (1 - \theta_1) D_2\left(\frac{R_2}{1 - \theta_1}\right) \\ &+ \mu \max\left(D_1\left(\frac{R_1}{1 - \theta_2}\right), 1_{\{\theta_1 + \theta_2 - 1 > 0\}} D_{12}\left(\frac{R_{12}}{\theta_1 + \theta_2 - 1}\right), \right. \\ &\left. D_2\left(\frac{R_2}{1 - \theta_1}\right)\right). \end{aligned} \tag{21}$$

The minimization (21) is discussed below for the Gaussian case. The minimization of (19) is then obtained by taking the minimum between (21) and the value obtained for the interval $\theta_{12,min} < \theta_{12} \leq \theta_{12,max}$ from (20).

B. Computation of the Sum of Jointly Gaussian Sources

In the special case of Gaussian sources S_1 and S_2 and of calculation of the function $T = S_1 + S_2$ as in Section IV-B, we can simplify (21) as

$$\begin{aligned} &D_\mu(R, \theta_1, \theta_2, \theta_{12,min}) \\ &= \min_{R_1, R_{12}, R_2} (2 - \theta_1 - \theta_2) D_1\left(\frac{R_1 + R_2}{2 - \theta_1 - \theta_2}\right) + (\theta_1 + \theta_2 - 1) \\ &\quad \cdot D_{12}\left(\frac{R_{12}}{\theta_1 + \theta_2 - 1}\right) + \mu \max\left(D_1\left(\frac{R_1 + R_2}{2 - \theta_1 - \theta_2}\right), \right. \\ &\quad \left. 1_{\{\theta_1 + \theta_2 - 1 > 0\}} D_{12}\left(\frac{R_{12}}{\theta_1 + \theta_2 - 1}\right)\right) \end{aligned} \tag{22}$$

$$\begin{aligned} &= \min_{R_{12}} (2 - \theta_1 - \theta_2) D_1\left(\frac{R - R_{12}}{2 - \theta_1 - \theta_2}\right) + (\theta_1 + \theta_2 - 1) \\ &\quad \cdot D_{12}\left(\frac{R_{12}}{\theta_1 + \theta_2 - 1}\right) + \mu \max\left(D_1\left(\frac{R - R_{12}}{2 - \theta_1 - \theta_2}\right), \right. \\ &\quad \left. 1_{\{\theta_1 + \theta_2 - 1 > 0\}} D_{12}\left(\frac{R_{12}}{\theta_1 + \theta_2 - 1}\right)\right), \end{aligned} \tag{23}$$

where (22) follows from the facts that $D_1(R) = D_2(R)$ for $R \geq 0$ and that the function is minimized when $R_1/(1 - \theta_2) = R_2/(1 - \theta_1)$; and (23) follows because the constraint $R_1 + R_2 + R_{12} \leq R$ is easily seen to be met with equality in any optimal solution.

We now numerically evaluate (23), the trade-off between the average distortion and the worst distortion for the Gaussian case at hand. Fig. 8 shows the optimal overlap fraction θ^*_{12} versus the relative weight μ when $(\theta_1, \theta_2) = (0.5, 0.75)$ and $\rho = 0.5$, for two choices of rates $R = 0.3$ and $R = 0.6$ respectively. From the curve with $R = 0.3$, we can see that, for sufficiently small μ, here, $\mu \leq 0.069$, the optimal sampling fraction is $\theta_{12,max} = 0.5$, consistent with the result of Fig. 5. However, as μ grows larger, the optimal sampling fraction drops to the minimum possible value $\theta_{12,min} = 0.25$. This is since, as the value of μ grows sufficiently large, one needs to keep the worst distortion as small as possible. Similar conclusions are reached for $R = 0.6$, except that the optimal sampling fraction for sufficiently small μ ($\mu \leq 0.004$) is 0.42 instead, which is also consistent with the result of Fig. 5.

VII. Multi-Hop Lossy Computing with Fractional Sampling

In this section, we extend the analysis of lossy computing with fractional sampling from the point-to-point setup to a multi-hop setup as depicted in Fig. 2. We assume that Encoder k can only sample a fraction θ_k of the samples for source S_k, with $0 \leq \theta_k \leq 1$, for $k = 1, 2$. Moreover, the encoders make decisions on which samples to sense independently and based only on the statistics of the sources. In particular, to ensure causality, Encoder 2 is not allowed to observe the message from Encoder 1 before making a decision on which samples to measure as instead assumed in [7] for a related set-up. Under this assumption, the sampling fractions can overlap for a fraction θ_{12}, with θ_{12} satisfying (1). Similar to the point-to-point setup of Fig. 1, it is without loss of generality to assume the sampling profile is as shown in Fig. 3. The links

between Encoder 1 and Encoder 2 and between Encoder 2 and the decoder can support a rate of R_1 bits/sample and a rate of R_2 bits/sample, respectively. As above, the goal is to estimate a function $T^n = f^n(S_1^n, S_2^n)$ at the decoder. It is observed that if R_1 is unbounded, then the scenario reduces to the point-to-point system studied in the previous sections.

Definition 2: A $(n, R_1, R_2, D, \theta_1, \theta_2, \theta_{12})$ code for the problem of multi-hop lossy computing of two memoryless sources with fractional sampling consists of an encoder (Encoder 1) $f_1 : \mathcal{S}_1^{n\theta_1} \to \{1, ..., 2^{nR_1}\}$; an encoder (Encoder 2) $f_2 : \mathcal{S}_2^{n\theta_2} \times \{1, ..., 2^{nR_1}\} \to \{1, ..., 2^{nR_2}\}$; and a decoder $g : \{1, ..., 2^{nR_2}\} \to \hat{\mathcal{T}}^n$ such that distortion constraint D is satisfied as in (2). It is assumed that encoder f_1 operates on the measurements $(S_{1,1}, ..., S_{1,n\theta_1})$ and encoder f_2 operates on the measurements $(S_{2,n(\theta_1-\theta_{12})+1}, ..., S_{2,n(\theta_1+\theta_2-\theta_{12})})$ as well as the index received from Encoder 1.

The distortion-rate function $D(R_1, R_2, \theta_1, \theta_2, \theta_{12})$ and the distortion-rate function $D(R_1, R_2, \theta_1, \theta_2)$ are defined in a similar manner as in the point-to-point setup of Section II. In the remaining of this section, we focus on the specific case in which sources S_1 and S_2 are Gaussian and the decoder wishes to compute the sum $T = S_1 + S_2$. Other cases studied in Section IV and Section V can also be investigated similarly.



Fig. 9. Lossy computing with side information at the decoder and fractional sampling: The encoder measures source S_1 for a fraction of time θ_1, and the decoder measures source S_2 for a fraction of time θ_2 and estimates a function $T^n = f^n(S_1^n, S_2^n)$.

A. Lower Bounds on the Achievable Distortion

Two lower bounds on the achievable distortion for the Gaussian multi-hop lossy computing problem discussed above can be derived based on the cut-set arguments [8]. Specifically, the first cut is around Encoder 1 and the second cut is around the decoder. These two cuts induce the following two subproblems of the original problem in Fig. 2: 1) For the cut around Encoder 1, the problem is equivalent to point-to-point lossy computing with side information, in which the encoder and the decoder can only measure a fraction of the n samples from the respective source; 2) For the cut around the decoder, the problem reduces to that of point-to-point source coding problem investigated in Section IV-B, leading to a lower bound as given by (9) of Proposition 2 with R replaced by R_2.

In the following, we study the first subproblem identified above, namely, the problem of lossy computing with side information at the decoder and fractional sampling as shown in Fig. 9. To elaborate, the encoder measures a fraction θ_1 of samples from S_1 and describes it using rate R_1 to the decoder. At the same time, the decoder measures a fraction, θ_2, of samples of a correlated source S_2, which overlaps with the encoder's measurements for a fraction θ_{12} of samples. Based on the description received from the encoder and its own measurements, the decoder forms the estimate $\hat{T}^n$.

Proposition 9: For the problem of lossy computing with side information at the decoder and fractional sampling, given sampling budget (θ_1, θ_2) and rate R_1, the distortion-rate function $D^{(1)}(R_1, \theta_1, \theta_2)$ can be obtained as follows.

1) For $\rho > 0$,

$$D^{(1)}(R_1, \theta_1, \theta_2) = \begin{cases} (1+\rho)^2(\theta_1 - \theta_{12}^*)2^{-\frac{2R_1}{\theta_1 - \theta_{12}^*}} \\ \quad +(1+\rho)^2(\theta_{12}^* - \theta_1 - \theta_2) + 2(1+\rho), \\ \qquad \text{if } R_1 \le \frac{\theta_1 - \theta_{12}^*}{2} \log_2\left(\frac{1+\rho}{1-\rho}\right), \\ \theta_1(1+\rho)^2 \left(\frac{1-\rho}{1+\rho}\right)^{\frac{\theta_{12}^*}{\theta_1}} 2^{-\frac{2R_1}{\theta_1}} \\ \quad +2\rho(1+\rho)\theta_{12}^* - (1+\rho)^2(\theta_1 + \theta_2) \\ \quad +2(1+\rho), \quad \text{otherwise}, \end{cases} \tag{24}$$

where $\theta_{12}^* = \theta_{12,min}$ is the optimal overlap fraction;

2) If $\rho \le 0$, then

$$D^{(1)}(R_1, \theta_1, \theta_2) = \begin{cases} (1-\rho^2)\theta_{12}^* 2^{-\frac{2R_1}{\theta_{12}^*}} - (1-\rho^2)\theta_{12}^* \\ \quad -(1+\rho)^2\theta_2 + 2(1+\rho), \\ \qquad \text{if } R_1 \le \frac{\theta_{12}^*}{2} \log_2\left(\frac{1-\rho}{1+\rho}\right), \\ \theta_1(1+\rho)^2 \left(\frac{1-\rho}{1+\rho}\right)^{\frac{\theta_{12}^*}{\theta_1}} 2^{-\frac{2R_1}{\theta_1}} \\ \quad +2\rho(1+\rho)\theta_{12}^* - (1+\rho)^2(\theta_1 + \theta_2) \\ \quad +2(1+\rho), \quad \text{otherwise}, \end{cases} \tag{25}$$

where $\theta_{12}^* = \theta_{12,max}$ is the optimal overlap fraction.

Proof: See Appendix E. ∎

Proposition 9 states that, in the setting of Fig. 9, it is optimal to have the overlap fraction as small as possible if the two sources are positively correlated, and as large as possible if they are negatively correlated. This result is consistent and follows from similar considerations as Proposition 3, 4 and 5.

B. Upper Bounds on the Achievable Distortion

In this subsection, we first propose a specific strategy, thus providing an upper bound on the achievable distortion. The derived upper bound is then compared to the lower bounds in Proposition 2 and Proposition 9 through numerical examples.

In the proposed strategy, we treat the $(\theta_1 - \theta_{12})$-fraction of samples measured only at Encoder 1, the overlapping θ_{12}-fraction measured by both the encoders, and the $(\theta_2 - \theta_{12})$-fraction measured only at Encoder 2 separately in terms of encoding and decoding. In particular, on the link between the two encoders, which is of rate R_1, we assign rate R_{11} to the encoded version of the $(\theta_1 - \theta_{12})$-fraction of samples and rate R_{12} to the θ_{12}-fraction. Moreover, on the link between Encoder 2 and the decoder, which is of rate R_2, we allocate rate R_{21} to forward the encoded version of the $(\theta_1 - \theta_{12})$-fraction, rate R_{22} to the θ_{12}-fraction and rate R_{23} to the $(\theta_2 - \theta_{12})$-fraction. By definition, we thus have the conditions

$$R_{11} + R_{12} \le R_1, \tag{26a}$$

$$\text{and } R_{21} + R_{22} + R_{23} \le R_2. \tag{26b}$$

We specify the source coding strategy used for the different fractions of samples and discuss the resulting average distortions as follows. For the $(\theta_1 - \theta_{12})$-fraction measured only by Encoder 1, we have available an end-to-end rate equal to $\min(R_{11}, R_{21})$. Encoder 1 thus compresses this fraction of samples of S_1 at rate $\min(R_{11}, R_{21})/(\theta_1 - \theta_{12})$ bits/source sample using a standard indirect rate-distortion optimal code, leading to average distortion $1-\rho^2+(1+\rho)^2 2^{-\frac{2\min(R_{11},R_{21})}{\theta_1-\theta_{12}}}$ [5]. Similarly, for the $(\theta_2-\theta_{12})$-fraction of samples measured only by Encoder 2, Encoder 2 can employ rate $R_{23}/(\theta_2-\theta_{12})$ using a standard indirect rate-distortion optimal code, leading to average distortion $1-\rho^2+\rho^2 2^{-\frac{2R_{23}}{\theta_2-\theta_{12}}}$ [5]. For the $(1+\theta_{12}-\theta_1-\theta_2)$-fraction measured by neither node, the average distortion at the decoder is equal to the variance of source $T = S_1 + S_2$, namely, $2(1+\rho)$. For the θ_{12}-fraction measured by both nodes, the setup at hand reduces to the multi-hop source coding problem investigated in [9] with the average link rates over the two links being R_{12}/θ_{12} and R_{22}/θ_{12}, respectively. Following the "re-compress" scheme proposed in [9], the resulting distortion for this fraction at the decoder is given by $D_0(R_{12}/\theta_{12}, R_{22}/\theta_{12})$, where $D_0(R_1,R_2) = (1-\rho^2)(1-2^{-2R_2})2^{-2R_1} + 2(1+\rho)2^{-2R_2}$, for $R_1 \geq 0$ and $R_2 \geq 0$.

Applying the source coding strategy described above, an achievable distortion at the decoder is given by summing the contributions of the different fractions of samples with the appropriate weights as

$$\begin{aligned} D_{ub}(R_1,R_2,\theta_1,\theta_2) = & \min_{\theta_{12},R_{11},R_{22}} \theta_{12} D_0\left(\frac{R_1-R_{11}}{\theta_{12}}, \frac{R_{22}}{\theta_{12}}\right) \\ & + (1+\rho)^2 \left[(\theta_1-\theta_{12})2^{-\frac{2R_{11}}{\theta_1-\theta_{12}}} + (\theta_2-\theta_{12})2^{-\frac{2(R_2-R_{11}-R_{22})}{\theta_2-\theta_{12}}}\right] \\ & + 2\rho(1+\rho)\theta_{12} - (1+\rho)^2(\theta_1+\theta_2) + 2(1+\rho), \end{aligned} \quad (27)$$

where the minimum is taken under the constraints (1) and (26). Note that in (27), we have set $R_{12} = R_1 - R_{11}$, $R_{21} = R_{11}$ and $R_{23} = R_2 - R_{11} - R_{22}$ without loss of optimality, since the two rate bounds in (26) are easily seen to be satisfied with equality at an optimal solution.

C. Numerical Results

Fig. 10 and Fig. 11 plot the achievable distortion $D_{ub}(R_1,R_2,\theta_1,\theta_2)$ and the corresponding optimized overlap fraction θ_{12}^* as a function of rate R_2 when $R_1 = 0.3$, $(\theta_1,\theta_2) = (0.5, 0.75)$ and $\rho = 0.5$. In Fig. 10, the two lower bounds obtained, $D^{(1)}(R_1,R_2,\theta_1,\theta_2)$ from Proposition 9 and $D^{(2)}(R_1,R_2,\theta_1,\theta_2)$ from Proposition 2 are also plotted for comparison. We observe that the distortion of the proposed scheme decreases as R_2 increases and gets arbitrarily close to lower bound $D^{(1)}(R_1,R_2,\theta_1,\theta_2)$, corresponding to the cut around Encoder 1, as R_2 gets sufficiently large. In contrast, lower bound $D^{(2)}(R_1,R_2,\theta_1,\theta_2)$, corresponding to the cut around the decoder, is tighter than lower bound $D^{(1)}(R_1,R_2,\theta_1,\theta_2)$ for small rates R_2.

The optimal overlap fraction θ_{12}^* for the achievable rate is equal to the minimum possible fraction $\theta_{12,min} = 0.25$ when R_2 is sufficiently small, i.e., $R_2 \leq 0.03$. It is interesting to compare this result with Proposition 5. In fact, the latter entails

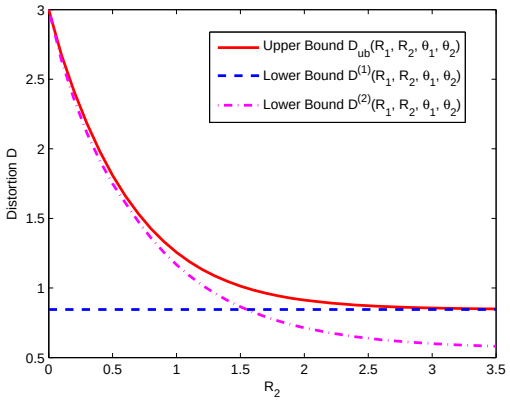

Fig. 10. The upper and lower bounds on the achievable average distortion versus link rate R_2 for computing $T = S_1 + S_2$, (S_1, S_2) jointly Gaussian with correlation coefficient $\rho = 0.5$. The sampling budget is $(\theta_1, \theta_2) = (0.5, 0.75)$ and the link rate between the encoders is $R_1 = 0.3$.

that, for the point-to-point case when R_1 goes to infinity, if rate R_2 is small enough, then the optimal overlap fraction θ_{12}^* equals the largest possible value $\theta_{12,max}$. Thus, the optimality of the choice $\theta_{12}^* = \theta_{12,min}$ in the multi-hop scenario with the given value of R_1 is due to the fact that the source S_1 received at Encoder 2 is noisy as a result of the necessary compression at Encoder 1. Moreover, since rate R_2 is very small, similar to Proposition 5, the rates of both links are entirely allocated for describing the overlapped fraction of samples.[5] As rate R_2 increases, the optimal overlap fraction θ_{12}^* gradually increases until it reaches the maximum possible value $\theta_{12,max} = 0.5$. In this regime, in addition to the overlapped fraction of samples, Encoder 2 also starts describing the non-overlapped fraction of samples measured only from source S_2. Finally, as R_2 grows beyond 0.16, the non-overlapped fraction of samples measured only from source S_1 also starts being allocated a non-zero rate and the optimal overlap fraction θ_{12}^* decreases down to the minimum possible value $\theta_{12,min} = 0.25$. This is consistent with Proposition 9, which shows that as R_2 goes to infinity, the optimal overlap fraction is $\theta_{12,min} = 0.25$.

VIII. Conclusions

In this paper, we considered the problem of lossy compression for computing a function of correlated sources. Motivated by the fact that acquiring the information necessary for computation may be costly in sensor networks, we assumed that the encoder can only observe a fraction of the samples from each source according to a sampling strategy that is subject to design. We also investigated the corresponding multi-hop problem with two encoders each observing a fraction of one of the sources. The results highlight the dependence of the optimal sampling strategy on the function to be computed by the decoder, on the source statistics, including the correlation, on the link rate and the desired metric for distortion. Interesting future work includes investigation of other network scenarios and extensions to sources with memory.

[5]The fact that θ_{12}^* equals $\theta_{12,min}$, despite the fact that only the overlapped samples are described, is explained mathematically by the non-convexity of function $D_0(R_1,R_2)$.

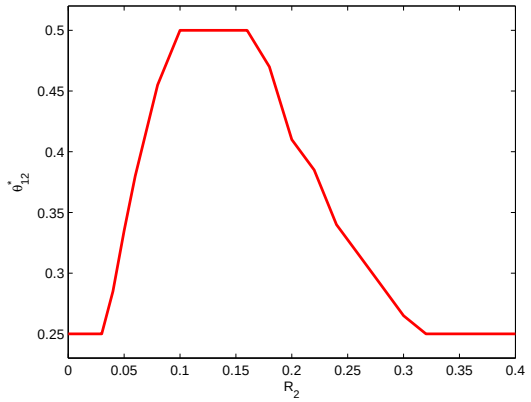

Fig. 11. The optimal overlap fraction θ_{12}^* that minimizes the achievable average distortion versus link rate R_2 for computing $T = S_1 + S_2$, (S_1, S_2) jointly Gaussian with correlation coefficient $\rho = 0.5$. The sampling budget is $(\theta_1, \theta_2) = (0.5, 0.75)$ and the link rate between the encoders is $R_1 = 0.3$.

Appendix A
Proof of Proposition 1

Given $T = S_1$, we have the distortion rate functions $D_1(R) = D_{12}(R) = 2^{-2R}$ and $D_2(R) = 1 - \rho^2 + \rho^2 2^{-2R}$ [5]. In this case, applying Lemma 1, we obtain

$$\begin{aligned} &D(R, \theta_1, \theta_2, \theta_{12}) \\ &= \min_{R_1, R_2, R_{12} \geq 0} (\theta_1 - \theta_{12}) 2^{-\frac{2R_1}{\theta_1 - \theta_{12}}} + \theta_{12} 2^{-\frac{2R_{12}}{\theta_{12}}} \\ &\quad + (\theta_2 - \theta_{12}) \left(1 - \rho^2 + \rho^2 2^{-\frac{2R_2}{\theta_2 - \theta_{12}}}\right) + (1 + \theta_{12} - \theta_1 - \theta_2) \qquad (28) \\ &= \min_{0 \leq R_2 \leq R} \theta_1 2^{-\frac{2(R - R_2)}{\theta_1}} + (\theta_2 - \theta_{12}) \rho^2 2^{-\frac{2R_2}{\theta_2 - \theta_{12}}} \\ &\quad + 1 - \theta_1 - \rho^2 (\theta_2 - \theta_{12}), \qquad (29) \end{aligned}$$

where the minimization in (28) is under the constraint $R_1 + R_2 + R_{12} \leq R$. Note that the optimization in (28) is equivalent to that in (29), since in any optimal solution, we have $R_{12}/\theta_{12} = R_1/(\theta_1 - \theta_{12})$ by the convexity of function 2^{-2r} for $r \geq 0$, and the condition $R_1 + R_2 + R_{12} \leq R$ must be met with equality. It can be easily seen that function $D(R, \theta_1, \theta_2, \theta_{12})$ above is monotonically non-decreasing with respect to θ_{12}. Therefore, the optimal overlap is the minimum possible, which equals $\theta_{12}^* = \theta_{12,min}$. Moreover, the optimal rate R_2^* that minimizes (29) can be obtained using standard Lagrangian methods similar to [3] as:

$$R_2^* = \frac{\theta_2 - \theta_{12}^*}{\theta_1 + \theta_2 - \theta_{12}^*} \left(R - \frac{\theta_1}{2} \log_2 \frac{1}{\rho^2}\right)^+. \qquad (30)$$

With the so obtained R_2^*, the results in Proposition 1 follows immediately.

Appendix B
Proof of Proposition 7

For any given sampling profile $(\theta_1, \theta_2, \theta_{12})$, in order to minimize the distortion with respect to R, we can take R to be arbitrarily large (in fact, given the binary alphabets, $R = 1$ suffices). With no rate limitations, it is easy to see that, during the θ_{12}-fraction, T can be computed at the encoder and described to the decoder losslessly with a rate equal to the entropy of T, $h((1-p)/2)$. During the $(\theta_1 - \theta_{12})$-fraction, only source S_1 is observed and can be described to the decoder losslessly with a rate $h(1/2) = 1$. Based on source S_1, the best estimate at the decoder is as follows: $\hat{T} = 0$ if $S_1 = 0$, and $\hat{T} = 1$ if $S_1 = 1$, leading to average Hamming distortion $p/2$. Similarly, during the $(\theta_2 - \theta_{12})$-fraction, the average Hamming distortion is also $p/2$. During the $(1 + \theta_{12} - \theta_1 - \theta_2)$-fraction, neither source S_1 nor source S_2 is observed. Since T is Bernoulli distributed with $(1-p)/2$, the best estimate is given by $\hat{t} = 0$, leading to average Hamming distortion $(1-p)/2$. Therefore, we have $D_{1,min} = D_{2,min} = p/2$ and $D_{max} = (1-p)/2$. Substituting into (7) of Lemma 2, we have

$$D_{min}(\theta_1, \theta_2) = \frac{1-p}{2} + \left(p - \frac{1}{2}\right)(\theta_1 + \theta_2) + \frac{1 - 3p}{2} \theta_{12}^*, \qquad (31)$$

where $\theta_{12}^* = \theta_{12,min}$ if $p < 1/3$, and $\theta_{12}^* = \theta_{12,max}$ if $p \geq 1/3$. Finally, from the discussion above, it follows that, for any $R \geq R_{min}(\theta_1, \theta_2) = \theta_1 + \theta_2 - (2 - h((1-p)/2))\, \theta_{12}^*$, distortion $D_{min}(\theta_1, \theta_2)$ can be achieved at the decoder.

Appendix C
Proof of Lemma 4

In the case of indirect description of T based on only source S_1, the indirect rate-distortion function is given by $R_1(D) = \min_{p(\hat{t}|s_1):\, Ed(T,\hat{T}) \leq D} I(S_1; \hat{T})$ [2]. Let $p(\hat{t} = 1 | s_1 = 0) = x$ and $p(\hat{t} = 1 | s_1 = 1) = y$, where $0 \leq x \leq 1$ and $0 \leq y \leq 1$. Note that if we select $x = y = 0$, i.e., $\hat{T} = 0$ with probability 1, the average distortion $D = (1-p)/2$ is achievable at the decoder. Thus, for $D \geq (1-p)/2$, we have $R_1(D) = 0$. Moreover, from the proof of Proposition 7, it follows that $D \geq p/2$ must hold. For the nontrivial case $p/2 \leq D < (1-p)/2$, the expected distortion constraint can be written as

$$\begin{aligned} E(d(T, \hat{T})) &= \frac{x}{2} + \frac{1-y}{2}(1-p) + \frac{y}{2} p \\ &= \frac{x + (2p-1)y + 1 - p}{2} \leq D, \qquad (32) \end{aligned}$$

and the mutual information $I(S_1; \hat{T})$ can be written as

$$I(S_1; \hat{T}) = H(\hat{T}) - H(\hat{T}|S_1) = h\left(\frac{x+y}{2}\right) - \frac{1}{2} h(x) - \frac{1}{2} h(y). \qquad (33)$$

For any given y, considering the monotonicity of (33) with respect to x for $0 \leq x \leq 2d - (1-p) + (1-2p)y$, we can easily show that (33) is minimized at $x = 2d - (1-p) + (1-2p)y$, i.e., (32) is met with equality. Therefore, for $p/2 \leq D < (1-p)/2$, we obtain $R_1(D)$ as in (15).

Appendix D
Proof of Proposition 8

If we set $\hat{T} = 0$ at the decoder, the resulting Hamming distortion is $(1-p)/2$. Hence, for $D \geq (1-p)/2$, zero rate is required for description, i.e., $R(D, \theta_1, \theta_2) = 0$. For $D_{min}(\theta_1, \theta_2) \leq D < \frac{1-p}{2}$, for any given sampling profile

$(\theta_1, \theta_2, \theta_{12})$, we can use Lemma 1 by setting $D_{1,min} = D_{2,min} = p/2$, $D_{12,min} = 0$ and $D_{max} = (1-p)/2$. Due to the convexity of $R_1(D)$, it is optimal to have $D_1/(\theta_1 - \theta_{12}) = D_2/(\theta_2 - \theta_{12})$ in any optimal solution. Moreover, with $D_{min}(\theta_1, \theta_2) \leq D < \frac{1-p}{2}$, for optimality, (6) must be met with equality, i.e.,

$$D_1 + D_2 + D_{12} + \frac{(1 + \theta_{12} - \theta_1 - \theta_2)(1-p)}{2} = D, \quad (34)$$

and D_1, D_{12} and D_2 must be such that $D_1/(\theta_1 - \theta_{12})$, D_{12}/θ_{12} and $D_2/(\theta_2 - \theta_{12})$ are all less than or equal to $D_{max} = (1-p)/2$. If we let $D_3 = D_1 + D_2$, then D_3 satisfies

$$\frac{p(\theta_1 + \theta_2 - 2\theta_{12})}{2} \leq D_3 \leq \frac{(1-p)(\theta_1 + \theta_2 - 2\theta_{12})}{2}. \quad (35)$$

Finally, taking the minimum of $R(D, \theta_1, \theta_2, \theta_{12})$ over all θ_{12} satisfying (1), we obtain $R(D, \theta_1, \theta_2)$ as in the proposition for $D_{min}(\theta_1, \theta_2) \leq D < \frac{1-p}{2}$.

APPENDIX E
PROOF OF PROPOSITION 9

For any given sampling profile $(\theta_1, \theta_2, \theta_{12})$, we denote by R_{11} and R_{12}, the rates used by the encoder in Fig. 9 to describe the non-overlapping $(\theta_1 - \theta_{12})$-fraction of samples and the overlapping θ_{12}-fraction of samples measured from S_1, respectively. During the θ_{12}-fraction, using rate R_{12}/θ_{12}, one can achieve average distortion $(1-\rho^2)2^{-2R_{12}/\theta_{12}}$ by the Wyner-Ziv theorem [10]. During the $(\theta_1 - \theta_{12})$-fraction, only source S_1 is observed and described to the decoder using rate $R_{11}/(\theta_1 - \theta_{12})$ and the resulting average distortion is given by $2(1+\rho)(1 - \tilde{\rho}^2 + \tilde{\rho}^2 2^{-2R_{11}/(\theta_1 - \theta_{12})})$, where $\tilde{\rho}$ is as defined in Section IV. During the $(\theta_2 - \theta_{12})$-fraction, since only S_2 is observed perfectly at the decoder, the resulting average distortion can be easily seen to be $1 - \rho^2$. Finally, during the $(1 + \theta_{12} - \theta_1 - \theta_2)$-fraction, with neither source S_1 nor source S_2 observed, the average distortion at the decoder is equal to the variance of T, namely, $2(1+\rho)$. From the independence of samples measured from the different fractions of samples, the minimum achievable distortion for sampling budget (θ_1, θ_2) and rate R_1 can be obtained as

$$\begin{aligned} D^{(1)}(R_1, \theta_1, \theta_2) = \min_{\theta_{12}, R_{11}, R_{12}} & (1-\rho^2)\theta_{12} 2^{-\frac{2R_{12}}{\theta_{12}}} \\ & + (1+\rho)^2(\theta_1 - \theta_{12})2^{-\frac{2R_{11}}{\theta_1 - \theta_{12}}} + 2\rho(1+\rho)\theta_{12} \\ & - (1+\rho)^2(\theta_1 + \theta_2) + 2(1+\rho), \end{aligned} \quad (36)$$

where the constraint on θ_{12} is as in (1) and the constraint on R_{11}, R_{12} is given by $R_{11} + R_{12} \leq R_1$. The minimum achievable distortion in the proposition is obtained by solving the optimization problem (36). Specifically, for $\rho > 0$, we can show that it is optimal to have $\theta_{12}^* = \theta_{12,min}$ by simply considering the monotonicity of function $D^{(1)}(R, \theta_1, \theta_2, \theta_{12})$ with respect to θ_{12}. Similarly, we can show that for $\rho \leq 0$, it is optimal to have $\theta_{12}^* = \theta_{12,max}$. Moreover, the optimal rate R_{11}^* and R_{12}^* can be obtained using standard Lagrangian methods similar to [3]. Details are omitted.

REFERENCES

[1] T. M. Cover and J. A. Thomas, *Elements of Information Theory 2nd Edition*. Wiley-Interscience, 2006.

[2] H. Witsenhausen, "Indirect rate distortion problems," *IEEE Trans. on Information Theory*, vol. 26, no. 5, 1980.

[3] X. Liu, O. Simeone, and E. Erkip, "Energy-efficient sensing and communication of parallel Gaussian sources," *IEEE Trans. on Communications*, to appear.

[4] L. Zhao, Y. K. Chia, and T. Weissman, "Compression with actions," 2012. [Online]. Available: http://arxiv.org/abs/1204.2331

[5] Y. Oohama, "Gaussian multiterminal source coding," *IEEE Trans. on Information Theory*, vol. 43, no. 6, Nov. 1997.

[6] H. Yamamoto, "Wyner-Ziv theory for a general function of the correlated sources," *IEEE Trans. on Information Theory*, vol. 28, no. 5, pp. 803–807, Sep. 1982.

[7] H. Permuter and T. Weissman, "Source coding with a side information vending machine," *IEEE Trans. on Information Theory*, vol. 57, no. 7, pp. 4530–4544, Jul. 2011.

[8] M. Gastpar, "Cut-set arguments for source-channel networks," in *Proc. of IEEE ISIT*, Chicago, IL, Jul. 2004, p. 32.

[9] P. Cuff, H. I. Su, and A. El Gamal, "Cascade multiterminal source coding," in *Proc. of IEEE ISIT*, Seoul, South Korea, Jun. 2009, pp. 1199–1203.

[10] A. D. Wyner, "The rate-distortion function for source coding with side information at the decoder II: general sources," *Information and controls*, vol. 38, pp. 60–80, 1978.